

DFF-N20

Precious Metal-brush Motors

Output : Approx 0.03W~1.0W

Typical Applications : MD Player Car CD Player Camera
Camcorder Radio Control Model


∅12.0



Specifications

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL			
	OPERATING RANGE	NOMINAL V	SPEED r/min	CURRENT A	SPEED r/min	CURRENT A	TORQUE g.cm	TORQUE mN.m	OUTPUT W	TORQUE g.cm	TORQUE mN.m	CURRENT A
DFF-N20VA-08260	6.0V MAX	5.0	14600	0.043	11150	0.14	2.6	0.255	0.30	11.0	1.08	0.45
DFF-N20VA-10190	6.0V MAX	3.0	12100	0.045	9600	0.15	1.9	0.186	0.19	9.4	0.92	0.54

UNIT:MILLIMETERS

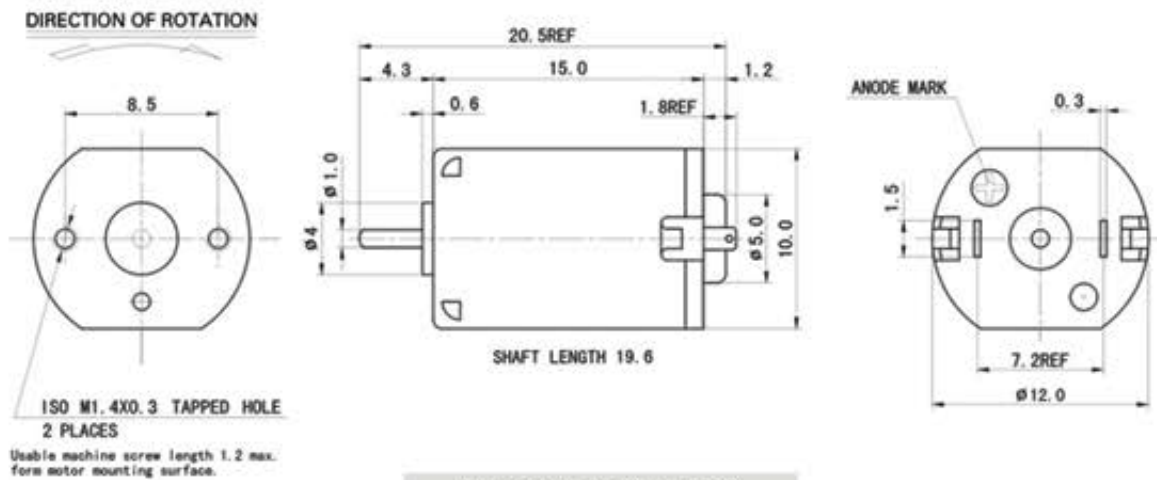

FF-N20VA-08260

5.0V

FF-N20VA-10190

3.0V

